




INSTRUCTION MANUAL

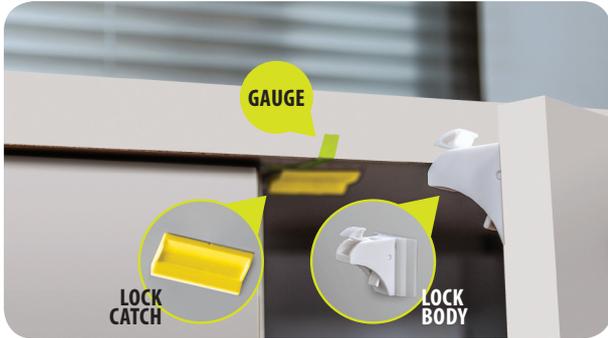


Please clean the surface that need to be installed and used.

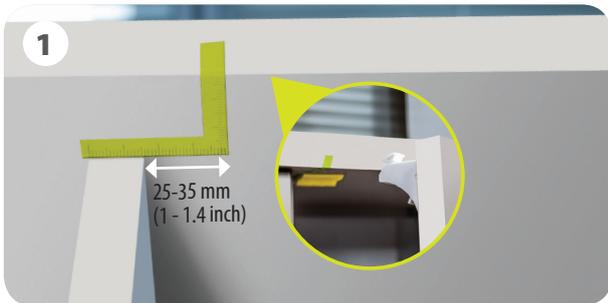

1. Fix the gauge which has been cut off on the bottom of the cabinet table, and make it 25-35mm distance from the side plate of the cabinet (as shown in figure 1).

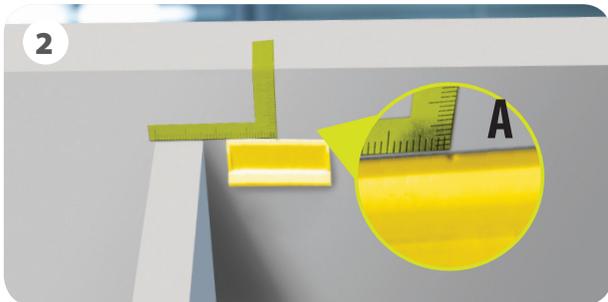

2. Paste the lock catch on the bottom of the cabinet table, keep the center groove outwards, make it alignment with the gauge angle (as shown in figure A), the location shall be parallel with the side plate of the cabinet (as shown in figure 2).

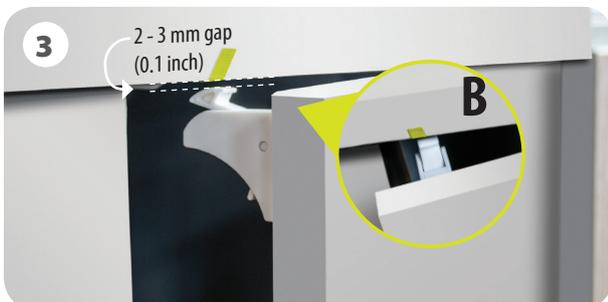

3. Install the lock body on the inside open of the cabinet door, make it 2-3mm (as shown in figure 3) distance from the bottom surface of the cabinet table, the latch hook shall be upwards, keep align center with gauge edge (as shown in figure B).



4. Please dial the button upward, normally open function can be realized (as shown in figure 4).
5. Put the key on the surface on the cabinet door, align it so you can open the lock (as shown in figure 5).
6. Place the key in the height that babies can't reach. Please adhere the key closing to protect the magnetic system inside and keep it safe (as shown in figure 6).
7. The installation method for drawer is similar with cabinet. also can be installed from side (as shown in figure 7).



INSTALLATION GAUGES (millimeter units)

